



WIRED CONTROL

- Simple and intuitive
- Controls machine driving, crane and manipulator
- Self-diagnostics & emergency button

BOOM MOBILITY

- Turret side rotation $\pm 10^\circ$
- -21° to $+55^\circ$ boom angle
- Double boom extension

FULLY ELECTRIC

- Battery powered, lead-acid type 24 V 155 Ah
- Minimal maintenance costs
- Emission-free indoor operation
- On board 110V or 230V fast battery charger
- Runtime over 1 workday



MODULAR BALLAST

- Easily removable ballast modules
- Operates with reduced ballast
- Automatic lifting capacity adjustment
- 191 kg total weight



EASY TO DRIVE EVERYWHERE

- Front-wheel drive with differential
- Wide steering angle
- Side stabilisers



OUTDOOR-INDOOR WHEELS

- Off-road tyres (foamed puncture-proof)
- Non-marking white tyres for indoor *



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units



*Optional



MPK06.2
2IN1 MINIPICKER

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.

MPK06.2



2IN1 MINIPICKER:
GLASS ROBOT & PICK&CARRY CRANE

Lifting capacity
MAX 600 kg

Max tip height
4.2 m

Dimensions (l x w x h)
1840 x 730 x 1450 mm


Powered by
Battery

Weight
915 kg
724 kg machine
191 kg removable ballast



EN [m - kg]

WORKING MODES

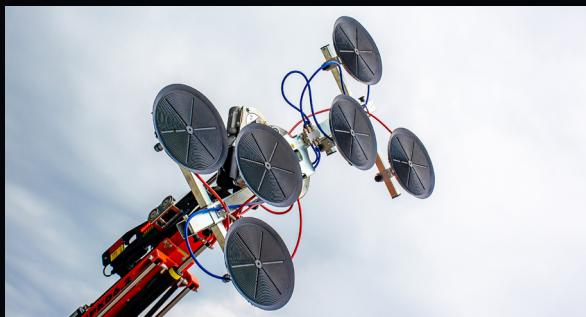



VACUUM MANIPULATOR 600 kg

- Up to 6 pads, modular layout
- Electrically operated via wired control
- Vacuum pump onboard
- Two independent vacuum circuits
- 360° rotation, tilt and swing
- Ø400 or Ø290 pads for glass, marble and slabs
- Special pads for monopanel
- "Blow-off" function for easy release
- Ball joint on pads for improved adaptability

ENDLESS PADS CONFIGURATIONS



Manipulator Load Chart

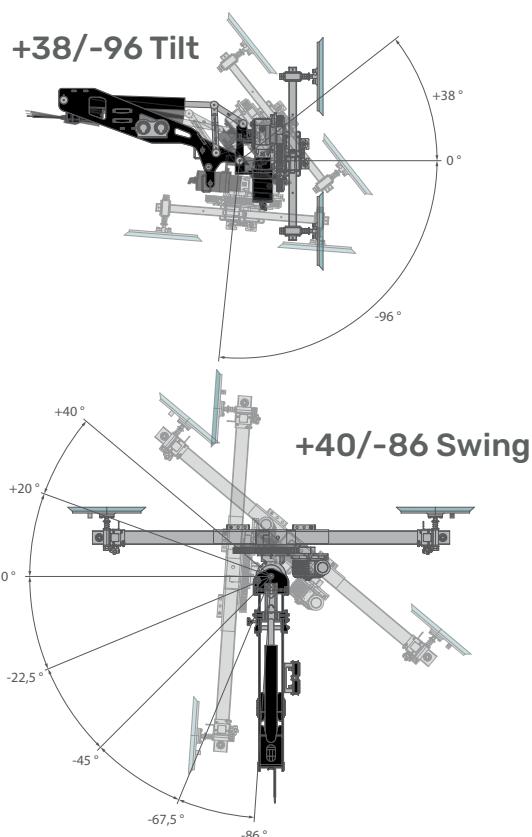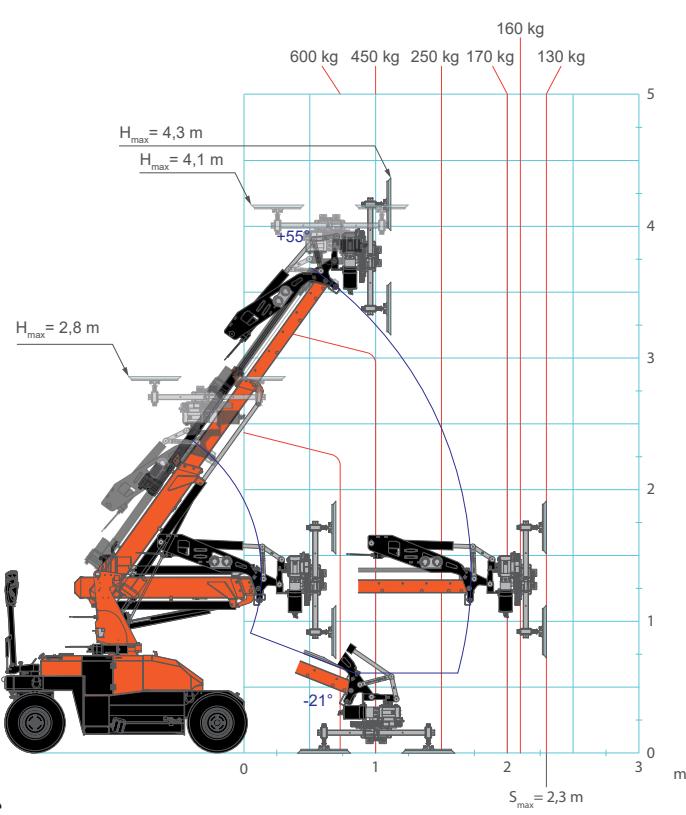

SEARCHER HOOK

- 4 angles: $+15^\circ$ / 0° / -30° / -60°
- Increases versatility
- Stowed onboard



600 kg

MANIPULATOR HOOK


- Quickly installed on manipulator frame
- Electrical tilt and swing

400 kg


HOOK

- 600 kg


600 kg

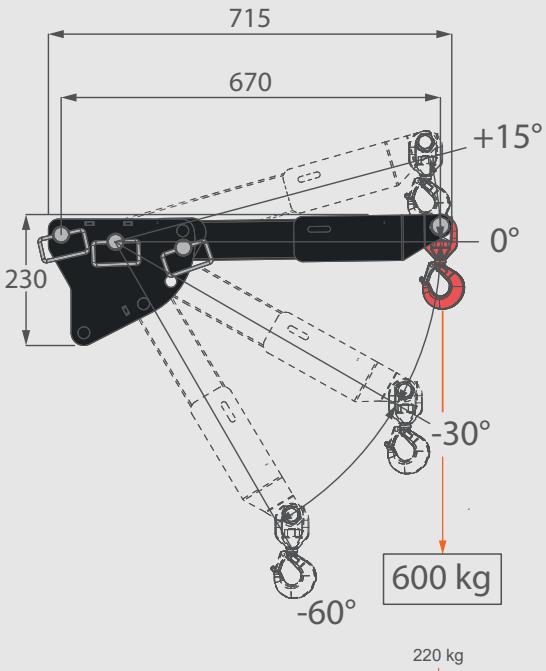

Searcher Hook Load Chart

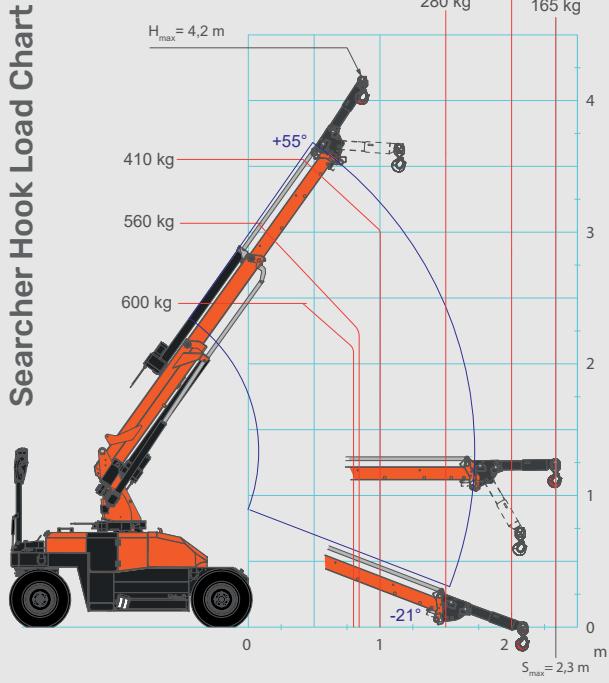

Manipulator Hook Load Chart

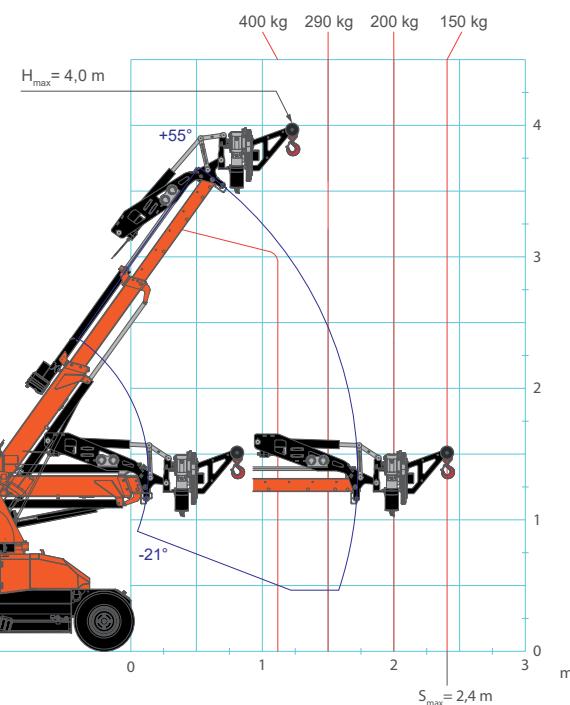

Hook Load Chart

